



# ERFURT-JuicyWalls digitally printed wallcoverings on ERFURT-Variovlies M 160, ERFURT-Vliesfaser 715, 717, 735, 738 and ERFURT-JuicyWalls BASIC

**ERFURT**  
WÄNDE ZUM WOHLFÜHLEN

DIGITALE  
FOTOTAPETEN


## Product benefits



PVC-free



Fire-retardant



For walls and  
ceilings



Breathable




Impact-  
resistant




No soaking  
necessary




Non-woven  
paste




Paste-the-wall  
technique




Covers cracks



Easy to remove



Excellent  
lightfastness




Washable


## Preparation/Use

### Please note the following:

Only use rolls from a single production batch and check the wallcovering for defects before pasting! Unroll the wallcovering before using on a smooth and clean base surface. Cut the individual drops using the white section provided and lay them beside each other to check the pattern match. Inspect this high-quality wallcovering very carefully at this stage to avoid subsequent complaints. Complaints, returns, exchanges or similar claims for products used will not be accepted.



**1.** Remove old wallpaper and paint. Smooth rough base surfaces with a plaster-based filler. Highly absorbent surfaces should be primed using a solvent-free primer.

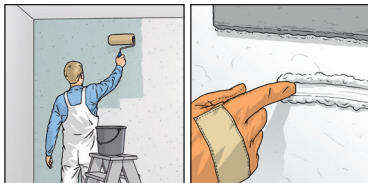

**2a.** We recommend the use of paste-the-wall technique with no soaking. Using a long-pile roller, generously (see finger test) paste the wall ready for one drop.



**2b.** Or a pasting machine without soaking.



**3.** Position the drops, matching the pattern, using a butt joint. Keep movement of the panels to a minimum once on the paste. Immediately wipe away any leaking paste carefully with a soft damp sponge.




**4.** Using a rubber roller or a wallpapering brush smooth out all folds and eliminate bubbles. **Never use a seam roller!**



**5.** Use a Stanley knife and palette knife to trim off excess material at ceilings, skirting boards or windows etc.



**6.** Do not overlap in corners and at edges, but separate precisely along the edge and butt joint the next drop.



**7.** Briefly ventilate the room during and after wallpapering, as excessive draughts or heating can cause the seams to open. Keep the door open and the windows closed at night. **Avoid draughts!**



**8.** For future redecorating, the wallpaper is easily removed.

**JUICYWALLS**

**PRO**

[www.erfurt.com](http://www.erfurt.com)